

XVPC36W

50MM BLU STEADY LENS UNIT/OFF-WHITE RING

Main

Commercial Status	Commercialised
Range of product	Harmony XVP Universal
Product or component type	Indicator bank
Beacon or indicator bank unit type	Illuminated unit with cream clamping ring
Signalling type	Steady
Mounting diameter	50 mm
Component name	XVPC
Material	Polycarbonate and polyamide
Light source	Blue bulb not included
Bulb type	Protected LED Incandescent with BA 15d base
[Us] rated supply voltage	<= 250 V

Complementary

Assembly style	Customer assembly, up to 5 units
Power dissipation in W	<= 7 W
Connections - terminals	Screw clamp terminals: <= 1 x 1.5 mm ² with cable end
Marking	CE
[Ui] rated insulation voltage	250 V conforming to IEC 60947-1
Nominal voltage limit	0.85...1.1 Un conforming to IEC 60947-5-1
[Uimp] rated impulse withstand voltage	4 kV conforming to IEC 60947-1
CAD overall width	56 mm
CAD overall height	65 mm
CAD overall depth	56 mm
Product weight	0.1 kg

Environment

Pollution degree	2
Product certifications	CULus
Standards	EN/IEC 60947-5-1
Protective treatment	TC
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...50 °C, with LED -25...50 °C, with incandescent
Class of protection against electric shock	Class II on base unit conforming to IEC 61140 Class I on support tube conforming to IEC 61140
IP degree of protection	IP65 conforming to IEC 60529


Contractual warranty

Period	18 months
--------	-----------

Indicator Bank without Audible Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

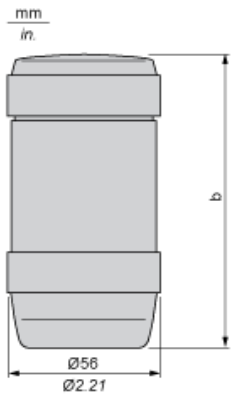

Number of illuminated units	b in mm	b in in.
1	108	4.25
2	170	6.69
3	232	9.13
4	294	11.57
5	356	14.02