


Countersunk head self tapping screws - PoziDriv® - Pointed

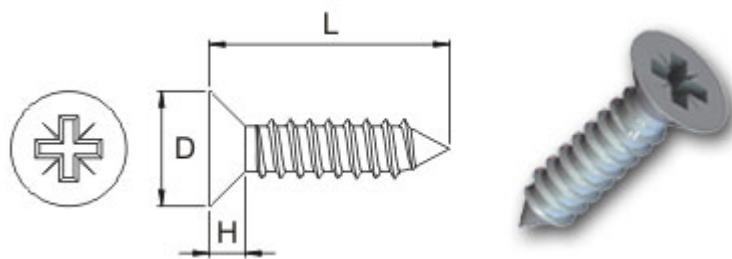

DIN 7982 C Z
ISO 7050 C Z
BS 4174 AB

Materials and Finishes

Case hardened steel/Zinc & clear de-embrittled
Stainless steel/Self colour

Dimensions								
d	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
d	No.2	No.4	No.6	-	No.8	No.10	No.12	No.14
D max	4.3	5.5	6.8	7.5	8.1	9.5	10.8	12.4
H max	1.3	1.7	2.1	2.3	2.5	3	3.4	3.8
Recess No.	1	1	2	2	2	2	3	3

Preferred Lengths

	Length (L)	Thread (d)							
		2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
Length (L)	4.5	ST	ST						
	6.4	ST	ST A2	ST					
	7.9	ST	ST A2	ST					
	9.5	ST	ST A2	ST A2	ST	ST A2			
	12.7	ST	ST A2	ST A2	ST	ST A2	ST A2	ST	
	15.9	ST	ST A2	ST A2	ST	ST A2	ST A2	ST	
	19		ST A2	ST A2	ST	ST A2	ST A2	ST	ST
	22.2		ST	ST	ST	ST	ST		
	25.4		ST A2	ST A2	ST	ST A2	ST A2	ST	ST
	31.8			ST	ST	ST A2	ST A2	ST	ST
	38			ST	ST	ST A2	ST A2	ST	ST
	44.5				ST A2	ST A2	ST	ST	
	50.8				ST A2	ST A2	ST	ST	
	57					ST	ST		
	63					ST	ST	ST	

	70							
	75					ST	ST	ST

ST - Steel, Zinc & clear de-embrittled

A2 - Stainless steel